

SINGLE-SEAL EXPANSION JOINT

Floor to Floor | Floor to Wall

25 - 100 mm (1 - 4") Expansion Gaps

Maxatec 150 : A01-A02

Features

Surface

Ribbed surface for improved slip resistance

Surface mounted

Centre supported and Americans with Disabilities Act (ADA) compliant across the entire movement cycle

Movement

High movement capacity

ASTM E-1399 Class I: Thermal

Class II: Wind

Traffic Frequency per day

				
> 25,000	≤ 1,000	≤ 100	≤ 10	-

System Options

Gap width(s)	25, 50, 75, 100 mm
Height(s)	25 mm
Metal type(s)	6063 T5 & T6 Aluminium
Seal colour(s)	Black (RAL 7021) Grey (RAL 7038) Beige (RAL 1015)
Fire barrier	120-240 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt



APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
Department Stores | Distribution & Retail Warehouses
Factories | Hospitals | Museums | Offices & Hotels
Parking | Places of Worship | Residential Buildings
Rail, Metros & Elevated Rail Stations | Roads & Bridges
Shopping Centres | Sports Stadiums | Supermarkets

SINGLE-SEAL EXPANSION JOINT

Floor to Floor | Floor to Wall

25 - 100 mm (1 - 4") Expansion Gaps

Maxatec 150 : A01-A02

Expansion Joint Selection Criteria

Load Rating


Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions				Product Number
		±	[Total]					Height		Sightline	Blockout	
								H1 (mm)	H2 (mm)	A (mm)	C (mm)	
Floor - Floor	25	± 6	[12]	5 kN	46 kN	30 kN	-	25	-	189	70	150-A01-025
	50	± 12	[25]							206	87	150-A01-050
	75	± 20	[40]	2 kN	31 kN	-				230	111	150-A01-075
	100	± 25	[50]							255	136	150-A01-100
Floor - Wall	25	± 6	[12]	5 kN	46 kN	30 kN	-	25	77	179	70	150-A02-025
	50	± 12	[25]							196	77	150-A02-050
	75	± 20	[40]	2 kN	31 kN	-				220	101	150-A02-075
	100	± 25	[50]							245	126	150-A02-100

Complementary Systems

Internal Wall - 150 : A07-A09 - Pg 76 - 77

Maxatec 150 : A01

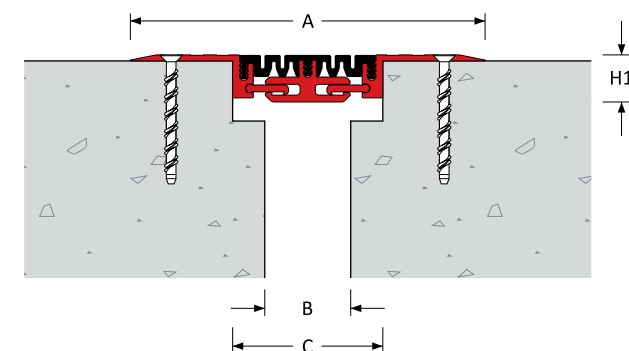

Maxatec 150 : A02

