

SINGLE-SEAL EXPANSION JOINT

Wall to Wall | Corner Wall

25 - 100 mm (1 - 4") Expansion Gaps

Features

Surface

Surface mounted

Ribbed surface for greater movement

Movement

High movement capacity

ASTM E-1399 Class I: Thermal

Class II: Wind

Traffic Frequency per day



-

-

-

-

-

System Options

Gap width(s)	25, 50, 75, 100 mm
Height(s)	16 mm
Metal type(s)	6063 T5 & T6 Aluminium
Seal colour(s)	Black (RAL 7021) Grey (RAL 7038) Beige (RAL 1015)
Fire barrier	120-240 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt

Maxatec 150 : A07-A09

APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
Department Stores | Distribution & Retail Warehouses
Factories | Hospitals | Museums | Offices & Hotels
Parking | Places of Worship | Residential Buildings
Rail, Metros & Elevated Rail Stations | Roads & Bridges
Shopping Centres | Sports Stadiums | Supermarkets



| United Kingdom | T : +44 (0) 3707 876 543 | E : info@vexcolt.com | W : www.vexcolt.com

| India | T : +91 9599 291 000 | E : info@vexcoltindia.com | W : www.vexcoltindia.com

www.vexcoltindia.com

SINGLE-SEAL EXPANSION JOINT

Wall to Wall | Corner Wall

25 - 100 mm (1 - 4") Expansion Gaps

Maxatec 150 : A07-A09


Expansion Joint Selection Criteria

Load Rating

Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions		Sightline A (mm)	Blockout C (mm)	Product Number
		±	[Total]					H1 (mm)	H2 (mm)			
Wall - Wall	25	± 6	[12]	-	-	-	-	16	-	189	70	150-A07-025
	50	± 12	[25]							206	87	150-A07-050
	75	± 20	[40]							230	111	150-A07-075
	100	± 25	[50]							255	136	150-A07-100
Corner Wall	25	± 6	[12]	-	-	-	-	16	58	129	70	150-A09-025
	50	± 12	[25]							147	89	150-A09-050
	75	± 20	[40]							170	111	150-A09-075
	100	± 25	[50]							196	136	150-A09-100

Maxatec 150 : A07

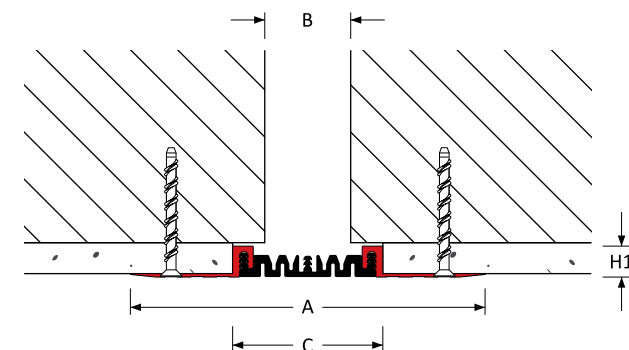

Maxatec 150 : A09

