

MULTI-SEAL EXPANSION JOINT

Floor to Floor | Floor to Wall
100 - 150 mm (4 - 6") Expansion Gaps

Features

Surface

Smooth surface

Americans with Disabilities Act (ADA) compliant
across the entire movement cycle

Movement

Good movement capacity

ASTM E-1399 Class I: Thermal
Class II: Wind

Traffic Frequency per day

				
≤ 5,000	-	-	-	-

System Options

Gap width(s)	100, 150 mm
Height(s)	16 mm
Metal type(s)	6063 T5 & T6 Aluminium
Seal colour(s)	Black (RAL 7021) Grey (RAL 7038) Beige (RAL 1015)
Fire barrier	120-240 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt

Maxatec 220 : A01-A02



APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
Department Stores | Distribution & Retail Warehouses
Factories | Hospitals | Museums | Offices & Hotels
Parking | Places of Worship | Residential Buildings
Rail, Metros & Elevated Rail Stations | Roads & Bridges
Shopping Centres | Sports Stadiums | Supermarkets



| United Kingdom | T : +44 (0) 3707 876 543 | E : info@vexcolt.com | W : www.vexcolt.com
| India | T : +91 9599 291 000 | E : info@vexcoltindia.com | W : www.vexcoltindia.com

www.vexcoltindia.com

MULTI-SEAL EXPANSION JOINT

Floor to Floor | Floor to Wall
100 - 150 mm (4 - 6") Expansion Gaps

Maxatec 220 : A01-A02


Expansion Joint Selection Criteria

Load Rating

Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions		Sightline A (mm)	Blockout C (mm)	Product Number
		±	[Total]					H1 (mm)	H2 (mm)			
Floor - Floor	100	± 25	[50]	-	-	-	-	16	-	237	237	220-A01-100
	150									289	289	220-A01-150
Floor - Wall	100	± 25	[50]	-	-	-	-	16	70	180	180	220-A02-100
	150									220	220	220-A02-150

Maxatec 220 : A01

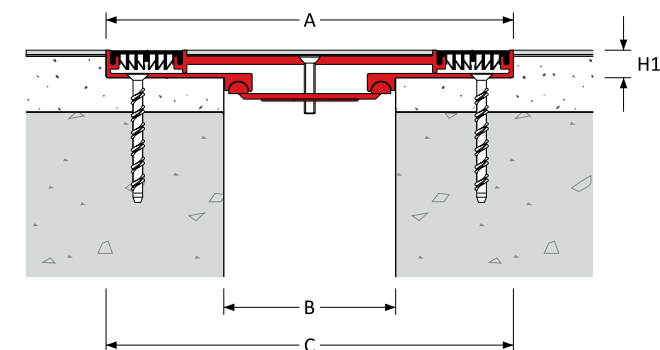

Maxatec 220 : A02

