

MECHANICAL EXPANSION JOINT

Floor to Floor

25 - 100 mm (1 - 4") Expansion Gaps

Transatec 1150 : A01

Features

Surface

Ribbed surface for improved slip resistance

Americans with Disabilities Act (ADA) compliant across the entire movement cycle

Movement

Good movement capacity


ASTM E-1399 Class I: Thermal
Class II: Wind

Traffic Frequency per day

				
> 25,000	≤ 1,000	≤ 1,000	> 25,000	≤ 100

System Options

Gap width(s)	25, 50, 75, 100 mm
Height(s)	41 mm
Metal type(s):	A36/S275 Structural Steel
Colour(s)	Black (RAL 7021)
Fire barrier	120-240 minutes
Waterproofing	Waterproofing membrane
Pre-assembly in factory	Contact Vexcolt

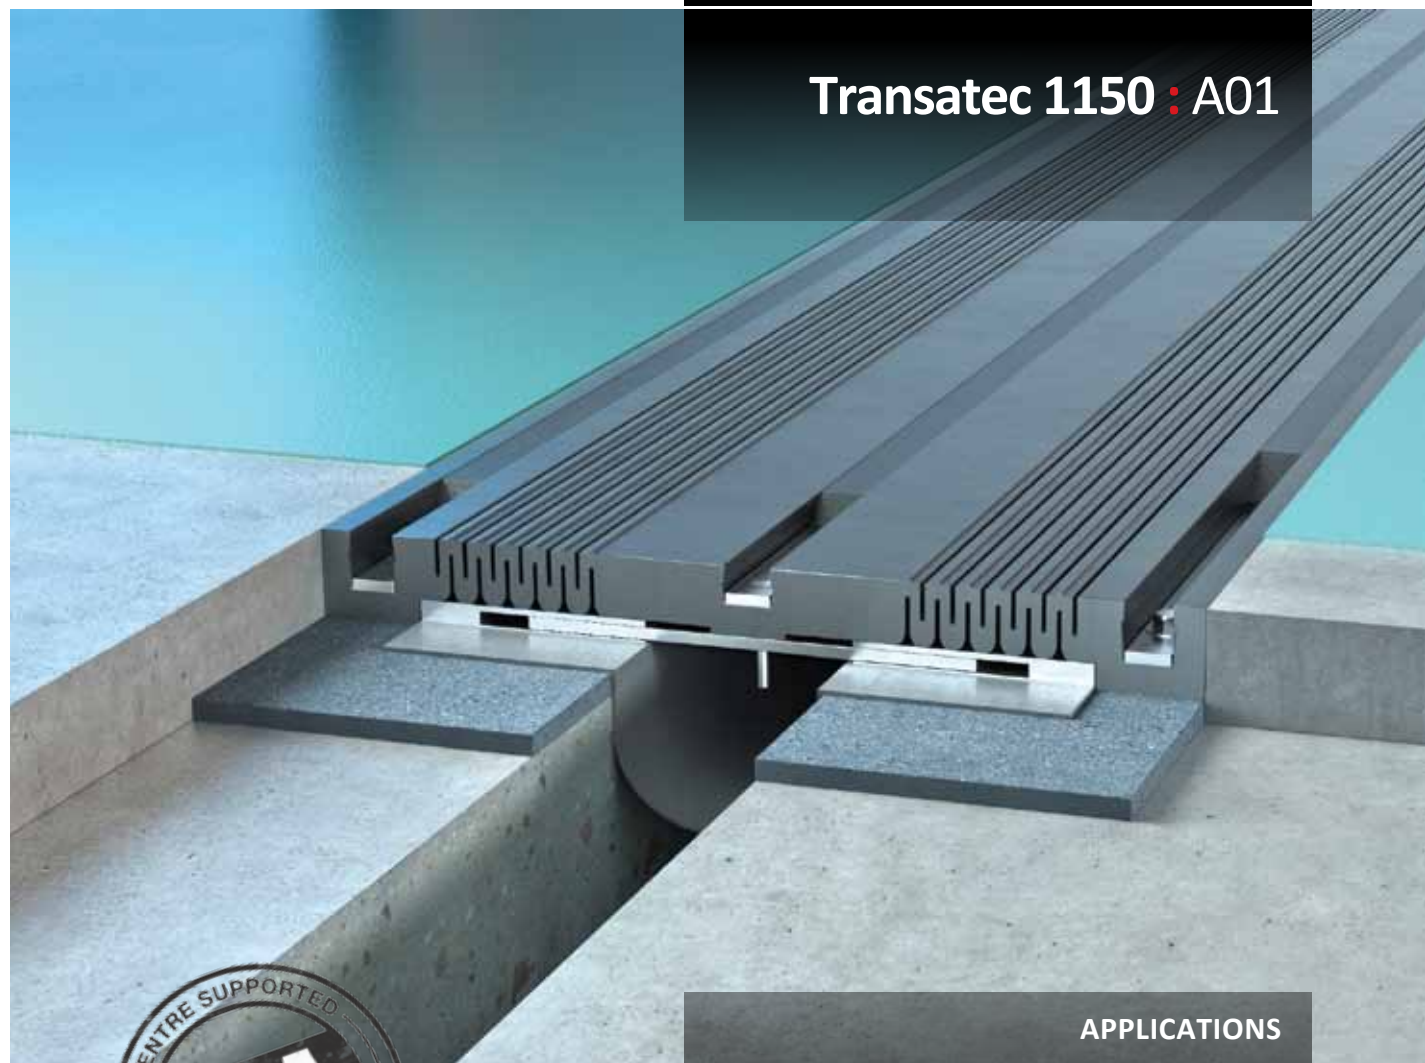

APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
Department Stores | Distribution & Retail Warehouses
Factories | Hospitals | Museums | Offices & Hotels
Parking | Places of Worship | Residential Buildings
Rail, Metros & Elevated Rail Stations | Roads & Bridges
Shopping Centres | Sports Stadiums | Supermarkets



| United Kingdom | T : +44 (0) 3707 876 543 | E : info@vexcolt.com | W : www.vexcolt.com
| India | T : +91 9599 291 000 | E : info@vexcoltindia.com | W : www.vexcoltindia.com

www.vexcoltindia.com

MECHANICAL EXPANSION JOINT

Floor to Floor

25 - 100 mm (1 - 4") Expansion Gaps

Transatec 1150 : A01

Expansion Joint Selection Criteria

Load Rating

Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions				Product Number
		±	[Total]					Height H1 (mm)	Height H2 (mm)	Sightline A (mm)	Blockout C (mm)	
Floor - Floor Deck - Deck	25	+48/-16	[64]					41	-	423	423	1150-A01-025
	50	± 40	[80]									1150-A01-050
	75	± 48	[96]									1150-A01-075
	100	± 48	[96]									1150-A01-100

